

**Standard Features**

Nominal Flow Rate: 4-40lpm
Electro Mechanical Totalizers
Preset Function
LCD Back Light Display 34mm
Electronic Calibration
ATEX 2014/34/EU
MID 2014/32/EU

Optional Features

EMV pay at the Pump
Interface with OPT Systems
RFID Transactions
Automatic Temperature compensation
On Pump printer
Hydraulic cabinet heater
Hose column heater

AdBlue S-2000 Series provides:

1. High accuracy Flow Meter
eliminates loss of product
2. State of art Electronics
3. Robust Construction
4. Visual Standards according
to customer's needs
5. Low total life cycle cost
6. Efficient long standing support
on genuine Spare Parts
7. Fast deliveries
8. Extended Warranty

ADBLUE S-2000 SERIES

Design features



STATE OF ART PRODUCTION FACILITIES

- Production facility housed in an industrial building of 3500m². To comply with the up-to-date technological market requirements the production is equipped with state of art equipment such as punching machines (CNC), testing facilities, underground fuel depots and MRP warehouses software.
- Production facility certified according to ATEX 2014/34/EU and MID 2014/32/EU Directives.




EXTERIOR HOUSING

- Galvanized Steel Metal Panels, powder coating paint for excellent appearance, maximum protection and long life.
- Durable construction in harsh environmental conditions.
- Stainless Steel Metal Panels (optionally).



HYDRAULICS

- High quality hydraulic components designed for Easy Installation, Simplicity on Operation and Minimum Maintenance Requirements.
- Flow Meter certified according to MID 2014/32/EU Directive, ensuring highest accuracy.

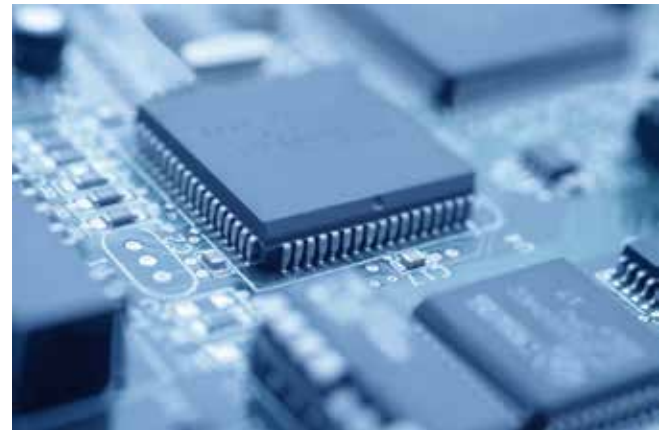


ELECTRONICS

- R&D Electronics Dept. manned with certified engineers, offering tailor made solutions.
- Electronics according to latest technology, with password, MID Certified.
- Built-in diagnostics with error codes indicated in state of the art LCD Backlight Displays.
- IFSF Communication Protocol.

ADBLUE S-2000 SERIES

Technical Specs

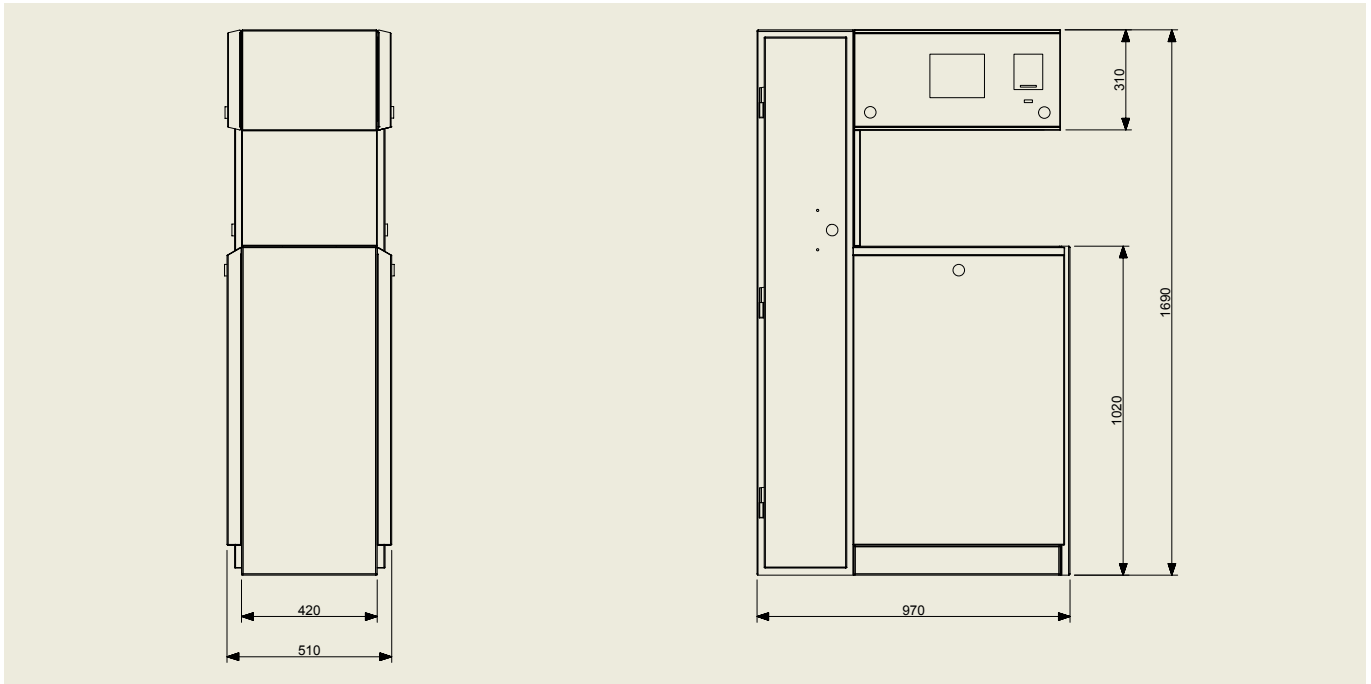

RETAIL ADBLUE DISPENSER
PRESSURE TYPE
SINGLE or DUAL HOSE
FLOW RATE: 4-40 lpm

Flow Meter

Positive displacement meter, corrosion proof, composed of materials with long-life and long-wear characteristics
Measuring accuracy within: $\pm 0,3\%$
Cylinder cover adjustment device provides easy on-field calibration
Micro exterior adjustment
Min. Flow rate: 4 lpm
Max. Flow rate: 80 lpm
Minimum adjustable quantity: 0.025%
Delivery capacity per revolution: 0.5L
Repeatable Tolerance: $\pm 0.1\%$
Applicable with AdBlue (AUS 32, DEF)
MID Certification

Options

Breakaway couplings
Custom colours
Electromechanical Totalizers
Stainless Steel Housing
Hydraulic cabinet heater
Hose column heater

Electronics

Atmel AVR Risc-Processor
Accuracy class: 0.5
Electromagnetic environment class: E1
Automatic Temperature Compensation
Self diagnostics
MID Certification

Hose


Type: AdBlue (Blue)
Length: 4.0m (Optionally any other length)
High quality braid reinforced antistatic hose
Certified: EN 1360:2013

Nozzle (LV, HV)

Type: Automatic
Body: Aluminum
Seals: NBR
Spout: Aluminum
Inlet diameter: 1"
ATEX

ADBLUE S-2000 SERIES

Design features

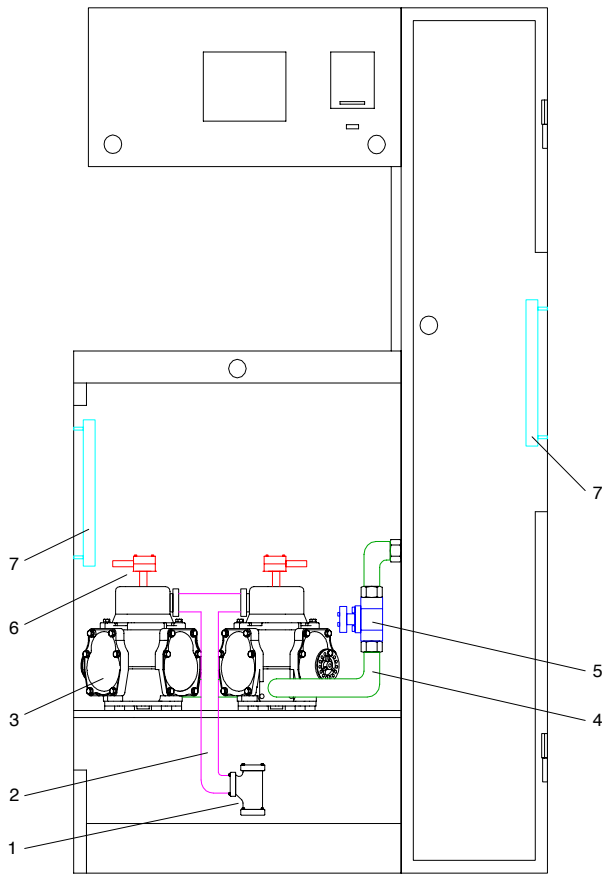

I/N	Part No.	Description
1	461612	FILTER 1 1/2" BSPP
2	222980	FLOWMETER INLET PIPE Ø22
3	430135	AdBlue FLOWMETER, AB85
4	222981	FLOWMETER OUTLET PIPE Ø22, INOX 316 (SHORT)
-	222982	FLOWMETER OUTLET PIPE Ø22, INOX 316 (LONG)
5	430321	SOLENOID VALVE 1"
6	420292	PULSER, P100
7	420872	HEATER

Spyrides Dispenser Range



Documentation

Documentation provided with each Fuel Dispenser:

- Installation, Operation and Maintenance Manual
- Parts Manual
- Warranty Declaration
- All relevant Certificates

SPYRIDES GROUP

Spyrides Group of Companies
24 Athinon Avenue, 104 41 Athens, Greece Tel.: +30 210 5228603, Fax: +30 210 5248347

www.neotec.gr
information@neotec.gr